

SUPAGRIP SAFEKERB RAMP

FEATURES

- Effective anti-slip surface and raised sides. Adapts to varying kerb or step heights (60mm to 160mm).
- Can be used as an access for wheelchairs, pushchairs, mobility scooters, sack trucks, wheelie bins etc., up to 350kg. Made from High-density polyethylene (HDPE).
- 100% recyclable. Compact stacking for easy transport & storage.

SUPAGRIP SAFEKERB RAMP

Product No.	0836
Length, end to end	1265mm
Length between side guards	1215mm
Width:	747mm
Height:	112mm
Weight:	10 kg



SIGNAGE PRODUCTS FOR TRAFFIC MANAGEMENT

DESCRIPTION

- We can provide all mandatory signage requirements for your traffic management needs.



WORKMAN AHEAD SIGN

DEN-QST1-56X6ALFR

SIGN WORKMAN AHEAD SYMBOLIC DIAMOND GRADE

Sizes:

- 600mm X 600mm
- 900mm x 600mm

SIGN ONLY, ENQUIRE FOR STAND



PEDESTRIANS WATCH YOUR STEP (CORFLUTE)

DEN-CT284-T8-1H

SIGN PEDESTRIAN WATCH YOUR STEP CORFLUTE -

Sizes:

- 600mm X 600mm
- 900mm x 600mm



PEDESTRIAN DIRECTING SIGN (CORFLUTE)

DEN-CT284-T8-2LH

SIGN PEDESTRIAN CORFLUTE ARROW LEFT

<<<<<<<<<<<

- 1200mm X 300mm
- 500mm x 200mm

SIGNAGE PRODUCTS FOR TRAFFIC MANAGEMENT

DESCRIPTION



STOP/SLOW SIGN W/WOODEN HANDLE

DENSSBC/W

SIGN STOP / SLOW - 450MM DIA BATTEN C/W WOODEN HANDLE



PEDESTRIAN DIRECTING SIGN (CORFLUTE)

DEN-MMSF

FRAME MULTI MESSAGE SUIT 600MM X 600MM, 1200MM X 300MM, 1200MM X 600MM SIGNS



PEDESTRIAN DIRECTING SIGN (CORFLUTE)

DEN-CT284-T8-2RH

SIGN PEDESTRIAN CORFLUTE ARROW RIGHT


>>>>>>>

- 1200mm X 300mm
- 500mm x 200mm

BARRIERS & ACCESSORIES

EXPANDING SAFETY BARRIER

- Extends to 4 metres.
- Only 600mm x 330mm footprint when stored.
- Comes with wheels for easy transport.

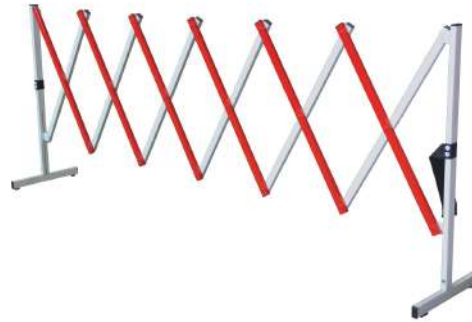

BARRIER TAPE

- High Visibility warning and barrier tapes.
- Suitable for internal or external work area marking.



BARRIER MESH

- An effective cost efficient temporary barrier.
- High Visibility Orange, re-usable and available in various grades.
- Supplied on 30m or 50m rolls.



MANHOLE GUARDS

TELSTRA APPROVED MANHOLE GUARD

- This Manhole Guard is approved by Telstra.
- Made from lightweight aluminium for ease of handling and durability.



SPACE SAVING MANHOLE GUARD

- Great space saving idea.
- Virtually fold in half
- Available with or without "A" frame



TELSTRA APPROVED MANHOLE GUARD (W/TENT)

- The "A" frame Telstra approved manhole guard allows for the fitting of a weatherproof and flame retardant tent with window.
- Tent and Frame may be ordered separately.



PIT KEY AND SEAL BREAKER

VAN-PKEY/VAN-SB

- We recommend that you use the PIT KEY in conjunction with a SEAL BREAKER to minimise the risk of back strain and or bending your key out of shape.
 - Remember that the PIT KEY is designed to lift the pit lid, it is not a crowbar or dragging tool.
 - Keep the pit key engaged as close to 90 degrees in relation to the pit lid as possible in order to eliminate the chance of bending.
 - Recommended for use on P1 through to P5 pit lids only. (P5 Pit Lids weigh approx 25kg)
-
- Once you have the pit key and seal breaker fitted snugly into the pit lid push the flat square plate down with your foot to pop the lid.
 - Keep the key in as close to an upright position as possible to reduce the risk of bending the head or shaft of the key.
 - A good rule of thumb is to keep the key and the lid at 90 degrees to each other.

NOTE: PIT KEYS and SEAL BREAKERS are covered for a 12 month warranty for manufacturing defects only.





ABN 44 071 568 771

"A-Z Product Solutions for Trade and Industry"

sales@all-trades.com.au

www.all-trades.com.au



COMMSCOPE TEST CORD KRONE 4 POLE

KR06089204400

- For testing Krone 4 Pole



PIT TAP BRACKETS

VAN-740/00110

- 10 pack



AEGIS 4 WAY CORDSET W/ RJ12

ATM-CZ2211

COMMS EQUIPMENT



Sydney Office
11/5 Hudson Ave
Castle Hill NSW 2154
Ph: 02 8850 2700



Melbourne Office
4/5 Kelleys Rd
Rowville VIC 3178
Ph: 03 9780 4850

RD312 PIT LID LOCATOR

DESCRIPTION

The RD312 locates lost or hidden metal covers in the street. It is light and simple to use.

FEATURES

- Gain can be manual or auto.
- The position is indicated by a varying pitch tone, the highest pitch indicating the maximum response over the target.
- It is robustly constructed from high impact ABS and aluminium
- Weatherproof to IP54.
- 1kg weight and is easy to use
- The RD312 will typically run for 30 hours from a 9v alkaline battery.





MADISON TERMINATING TOOL FOR CMUX

MADR300069

- Genuine R&M tool for wiring all VS compact modules. The wires are contacted and cut to length in a single and efficient step. Widely used for the NBN street cabinet works - for new installations, upgrades and maintenance for the FTTN roll-out.



CABLE BEARER

ATM426

- This galvanized steel bracket is fixed to manhole walls (in pairs) to support a cable joint.
- Galvanised to ensure a long service life in a hostile environment.
- Provided is a \varnothing 16mm dia hole for a suitable masonry fastener.




ABC CABLE PIERCING TOOL

ATM-PPI514

- Up to 150mm²

GATIC PIT KEY SET

- Our "Gatic" style pit and manhole lid lifting set is packed in a heavy duty storage bag and is printed for easy identification. The contents include the following....
 - 2 x Long Handled Keys
 - 1 x Short Handled Key (also known as a sealbreaker)
 - 2 x Roll Bars – a handy method employed for effective transport of the lid away from the pit.
 - 1 x Scraper – Used to clear built up debris from the lid surrounds.
 - 1 x Spanner – Used to tighten the bolt heads on the keys, in order to provide a firmer grip on the lid.
 - 1 x Storage bag – Made from tear resistant canvas fabric. The bag is stencilled , has zipper and carry handles. For your convenience, the contents of the kit can be bought separately if required.

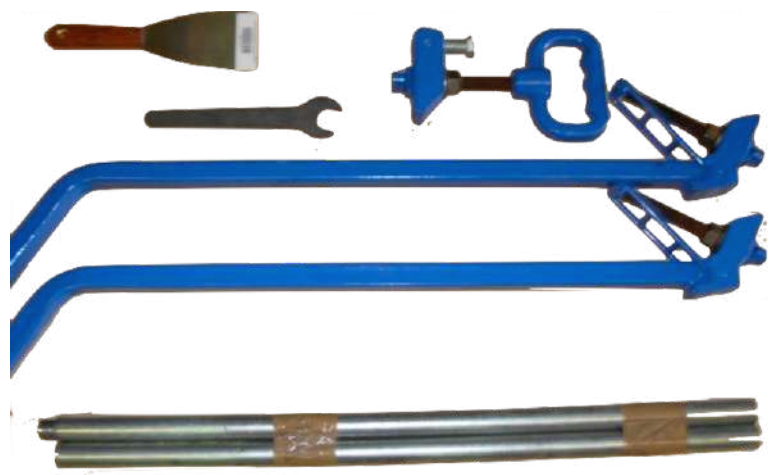


COMPACT MANHOLE COVER LIFT


ATM-116120

MANHOLE COVER LIFTER INSTRUCTIONS (116/120)


STEP 1
PLACE LIFTER WITH TEE
HOOK (CLEVIS) IN
KEYHOLE AS SHOWN

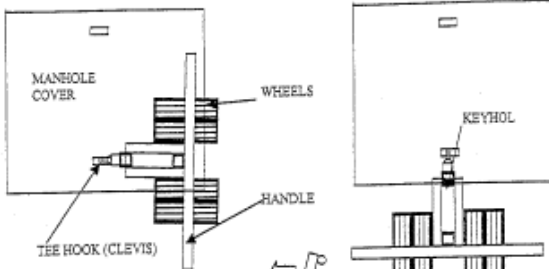


STEP 2
ROTATE LIFTER SO THAT THE TEE
HOOK IS AT RIGHT ANGLES INSIDE
THE KEYHOLE

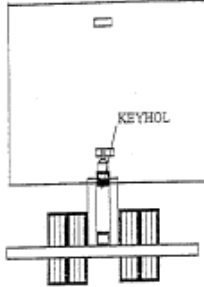

STEP 3
PULL HANDLE IN
DIRECTION
SHOWN TO BREAK
THE SEAL AND
PICK UP COVER.



STEP 4
CONTINUE TO PULL HANDLE BACK
& DOWN WARDS UNTIL COVER IS
LIFTED AND TRANSPORTABLE TO A
SAFE LOCATION.

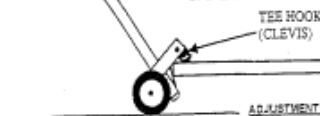

ADJUSTMENT OF THE HOOK (CLEVIS)

Position A—Above the surrounding ground level.
Position B—At ground level.


Position B1 & B2—Below the surrounding ground level.



POWERED DUCT RODDER

DESCRIPTION

- Capable of pushing & pulling, suitable for underground cable installs
- 300DAN PUSH/ 200DAN PULL
- Hydraulically operated command lever (forward/hold/reverse)
- Hydraulic force gauge
- Caterpillar track
- Electric start engine
- Metre counter
- 0-50m/min
- Housed rod brush (to clean off dirt & grime)
- 15mm Ø X 500MTR

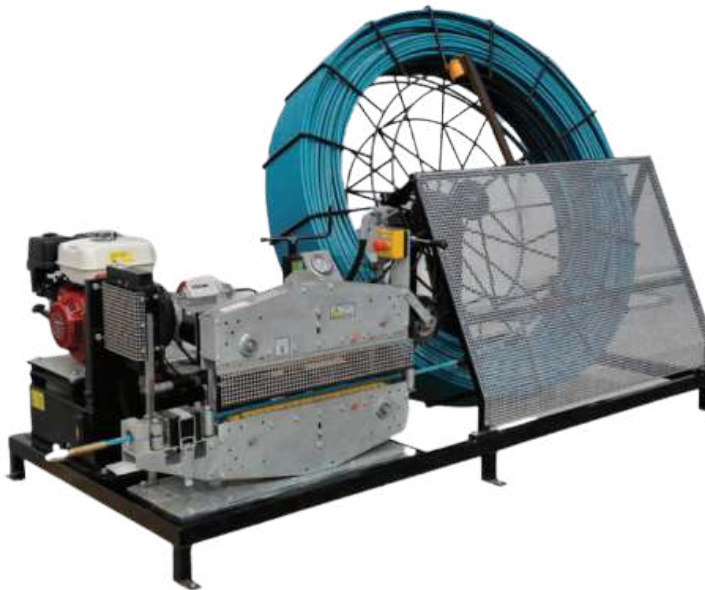

WATER JETTER 5075 PSI

FEATURES

- Stainless Steel Frame
- Superior strength and corrosion resistant
- Pump made in Italy
- Assembled in USA
- Genuine Honda GX690 engine: Proven reliability

SUITABLE FOR:

- Clearing blockages in pipes
- Sewer Cleaning
- High Pressure Cleaning
- Graffiti Removal
- Rust Removal

SPECIFICATIONS



- Power: 27HP
- Engine: Honda GX690
- Type: Air Cooled 4-Stroke
- Displacement: 688cm³
- Compression Ratio: 9:3:1
- Fuel Consumption: 6.7L/hr @ 3600rpm
- Oil Capacity: 1.9L
- Pump: Bertolini KTL 2035
- Max Pump Pressure: 5057psi
- Rated Flow: 23.2L/min



HEAVY DUTY WEED WAKKA

ATM-WWK-HD

- Ideal for clearing everything from fine grass to tussock, blackberry, lantana and tree saplings up to thumb thickness
- Double articulated blades reduce kickback if solid object is hit

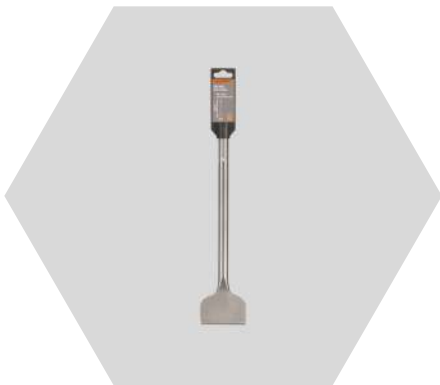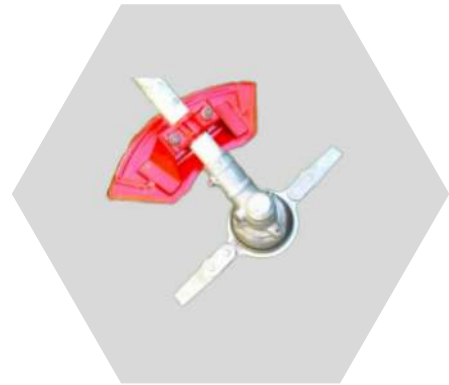

CHISEL BIT SDS MAX

ATM-2390240


-
-
-

Made from durable steel
Great for light demolition tasks
Suits any brand of SDS Max tools

PODGER RATCHET

ATM-RRP2430

- ATM-RRP2430 - PODGER RATCHET "KING DICK" - 24 X 30MM
- Precisely machined
- Heat-treated
- Zinc plated
- High quality steel

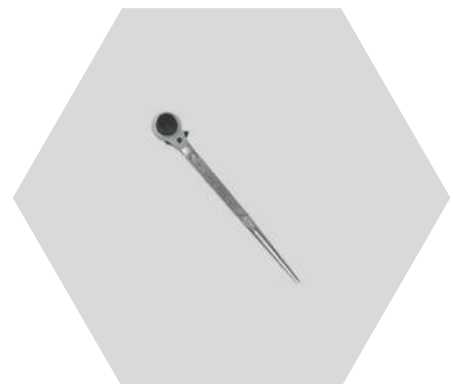



STIHL BRUSHCUTTER

ATM-FS94R

- The new 2-stroke engine features an advanced stratified charge system that boosts power
- Simply Set the choke, pump the fuel primer, pull the starter cord and away you go
- STIHL anti-vibration system
- Weight: 4.9kg

TANAKA & SONS 26CC 2-STROKE REVERSIBLE ENGINE DRILL

PLT-TED260RS

- 26cc, 2-Stroke TAS Engine
- Built with a reverse Gear for maximum usability
- Powerful 20:1 reduction for maximum torque.
- Suitable for wood, steel or masonry



STIHL PROFESSIONAL CHAINSAW

ATM-MS462C

- Lightest high-performance saw in the 70 cm³ cubic capacity class.
- Extraordinarily easy to manoeuvre, with outstanding acceleration.
- For felling and pruning in medium-density and high-density stands

FIBRE OPTIC MOVING MACHINE

DESCRIPTION

- Highly robust machine, engineered specifically for external use and capable of blowing single and multiple fibre cables into multiductings. Designed to blow or float fibre cables from 8-25mm into duct sizes 18-70mm at speeds of up to 80m per minute over distances up to 10km (using water).

FEATURES

- Use with Air or Water*
- Only for Single Cable
- Rugged Construction
- Flexible Adaptability
- Adjustable Torque
- Distance and Speed measurement
- Ease of Use
- Simple Maintenance

SPECIFICATIONS

- Typical Usage: Outside
- Fiber/Cable OD: 8-25 mm
- Duct Size OD: 18-70 mm
- Initial Speed up to: 80 m/min (260 ft.)
- Pushing Force: 0-125 kg
- Blowing Distance: up to 10000 m (32810 ft.)
- Rec. Airflow: 8000-10000 Vmin (282.5-423.8 cfm)
- Rec. Pressure: 8-12 bar air (120-170 psi)
- Length: 650 mm
- Width: 230 mm
- Height: 350 mm
- Weight: 38 kg




GRUNDOMAT

DESCRIPTION

- Grundomat pneumatic piercing tools have been providing accurate horizontal bores beneath roads, railways, and landscaping around the world for nearly 45 years. Water, gas, sewer and electrical industries have all benefited from this work horse of trenchless technology. Minimal operating space is required and the horizontal boring tool serves as a complement, and in many situations an economical alternative to, larger, more expensive directional drilling equipment

FEATURES

- Can perform accurate horizontal bores from 50-150 feet in length
- Can be used in all displaceable soils (sand, loam, gravel etc.)
- In just one simple step, the moling tool performs a bore and pulls in pipe behind it
- Minimal disruption to traffic, buildings, and other utilities
- Avoids sizable surface damage and costly restoration required for old trenching methods
- Accelerated project completion timeline
- Easy to set up and operate
- Minimal crew size

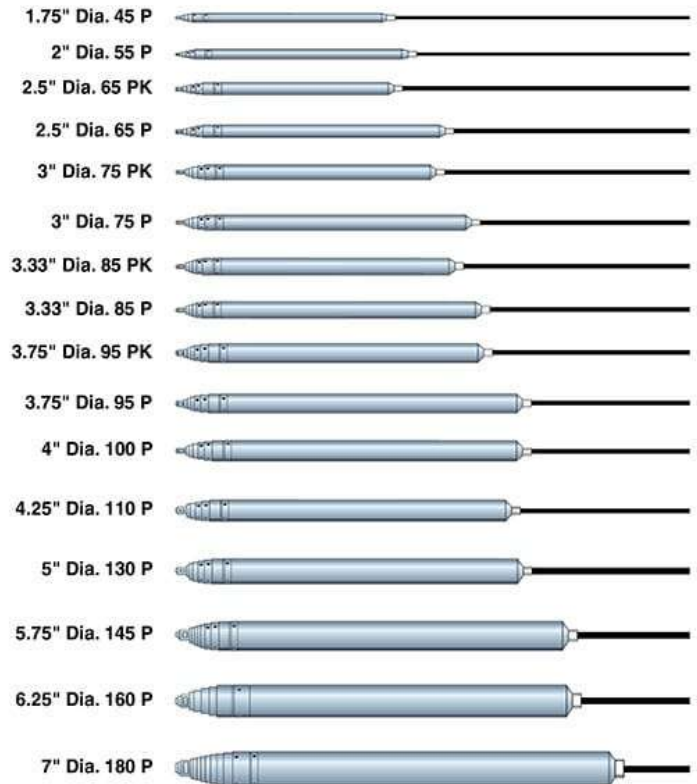

ENQUIRE FOR



ABN 44 071 568 771

"A-Z Product Solutions for Trade and Industry"

sales@all-trades.com.au

www.all-trades.com.au

GRUNDOMAT

SPECIFICATION SHEET

MODEL	TOOL DIAMETER (IN.)	TOOL PART #	BASIC PACKAGE PART #	DELUXE PACKAGE PART #	LENGTH (IN.)	WEIGHT (LBS.)	AIR CONS. (CFM)	STROKES /MINUTE
45 P	1 3/4	GP0450032	07076917	07060417	39	20	12	580
55 P	2	GP0550031	07076920	07060120	43	32	18	480
65 PK	2 1/2	GKP0650030	07076924	07060424	41	40	23	640
65 P	2 1/2	GP0650030	07076926	07060426	52	55	25	460
75 PK	3	GKP0750031	07076929	07060429	49	62	28	460
75 P	3	GP0750031	07076930	07060430	57	75	32	400
85 PK	3 1/3	GKP0850028	07076933	07060433	53	88	25	480
85 P	3 1/3	GP0850030	07076934	07060434	61	101	32	390
95 P	3 3/4	GP0950030	07076937	07060437	68	143	53	320
95 PK	3 3/4	GKP0950030	07076939	07060439	60	123	46	360
100 P	4	GP1000025	07076940	07060440	68	148	53	320
110 P	4 1/4	GP1100030	07076943	07060443	66	212	64	325
130 P	5	GP1300028	07076950P	07060450P	69	258	92	340
145 P	5 3/4	GV1450030	07076957P	07060457P	78	370	120	310
160 P	6 1/4	GV1600030	07076960P	07060460P	79	437	159	320
180 P	7	GV1800030	07076970P	07060470P	87	573	159	280

ENQUIRE FOR ANY HELP CHOOSING A GRUNDOMAT FOR YOUR SPECIFIC APPLICATION.

AERIAL EQUIPMENT



Sydney Office
11/5 Hudson Ave
Castle Hill NSW 2154
Ph: 02 8850 2700



Melbourne Office
4/5 Kelletts Rd
Rowville VIC 3178
Ph: 03 9780 4850


2KN FIBRE OPTIC SKID MOUNT WITH PETROL ENGINE

DESCRIPTION


- The 2kN Fibre Optic winch is used for pulling fibre optic cable by wrapping the cable directly onto a large diameter capstan. The capstan diameter is approx. 1400mm and is of suitable diameter not to damage the fibre optic cable during the pulling process. Fibre optic winches can be set up to a maximum line pull of 2kN. However, they can be adjusted via the control console to pull line force of anything less than 2kN and have a constant line pull throughout the pulling process.
- Skid-mount winch assembly is supplied with operator controls on the side of the unit and a separate foot-operated control for stop and forward/reverse of the wheel rotation. This design is a refinement of previous designs. After the unit has been set up a single operator can control the unit – this is a labour saving device.

SPECIFICATIONS

- Capstan winch overall Length
 - 2030 mm
- Capstan winch overall width
 - 1360 mm
- Capstan winch overall height
 - 740 mm
- Capstan winch overall mass
 - 415 kg
- Base frame length
 - 1400 mm
- Base frame width
 - 900 mm
- Engine type
 - Petrol
- Fuel tank capacity
 - 4.1 litres
- System pressure
 - 172 bar
- Maximum flow
 - 7.2 L/min
- Hydraulic oil
 - Castrol AWS 46
- Hydraulic oil tank capacity
 - 35 litre
- Diameter of capstan wheel
 - 1300mm
- Finished in powdercoat interpon safety Yellow
 - Standard
- Foot control (view image)
 - Standard

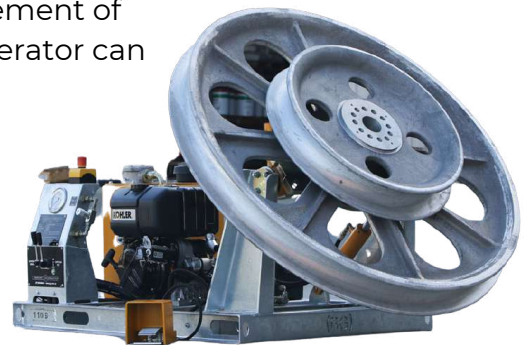

2KN FIBRE OPTIC SKID MOUNT WITH PETROL ENGINE

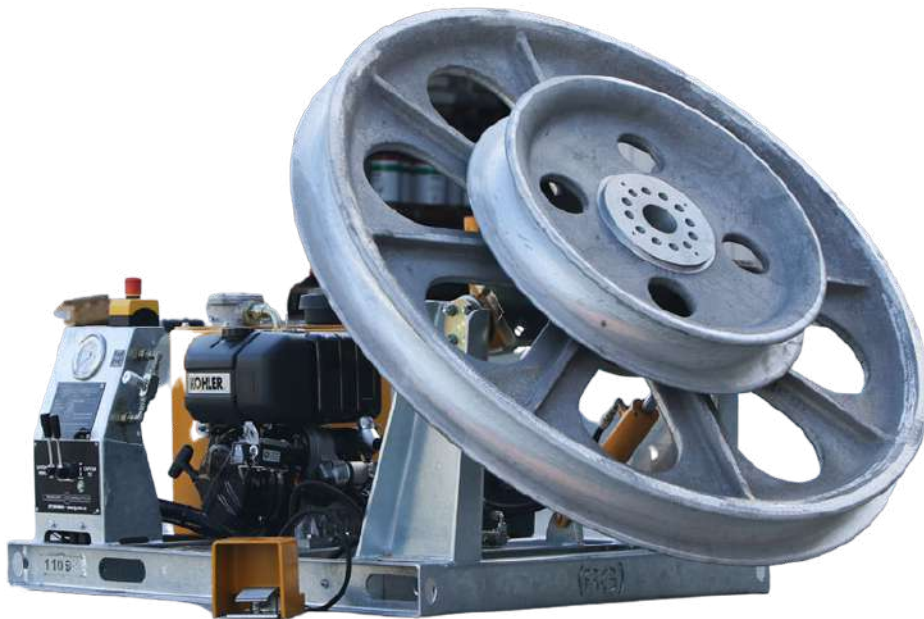

Rated Line Pull Capacity	Capstan Diameter	Max Line Speed	Pressure Compensator Setting
2 kN	1300 mm	60 m/ min	172 bar
4 kN	650 mm	30 m/ min	172 bar
7 kN	325 mm	15 m/min	172 bar



TELESCOPIC RAKE

ATM-B999

- Light weight 0.9-1.8m telescopic rake
- Spring steel tines with 19-56cm spread
- Cam lock to secure tines in desired position
- Weight 765g

MISC.

BROOM 35CM BASS CANE

ATM-B-32007FB

- Extra stiff blend of natural bassine and cane bristles effectively collect large particles
- Can be used on roads and heavy bitumen



DUST PAN & BROOM

ATM-4460391

- Made from strong polypropylene plastic
- Comes with thick fill bannister brush

ROAD CONES

DESCRIPTION

Placed on roads or footpaths to temporarily redirect traffic in a safe manner. They are often used to create 'merge lanes' during road construction projects or auto accidents.



PORTACONE COLLAPSIBLE ROAD CONES

DESCRIPTION

- Steady or flashing LED collapsible road cones.
- Each Porta-cone is supplied in a PVC weatherproof Carry Bag for clean storage.



ALL TRADES EXTENDABLE CONE BAR

DESCRIPTION

- Extendable Cone Bar, Black with Reflective Yellow.
- UV Treated ABS and HDPE Material with reinforced end loops.
- Strong and durable design. Loops designed to fit over traffic cones and T-Top bollards to barricade off areas and assist with pedestrian management.





CABLE TIES (PER 100)

CAB-CT250BK

-
-
-
-

Loop Tensile Strength: 54kg

Bundle Diameter: 102mm

Length: 370mm

Width: 7.6mm

MISC.

CABLE TIE - SCREW MOUNTABLE

ATM-SM143

- For long life and dependable service
- With cable ties available in lengths from 100mm to 1168mm



BLACK AD BASE 12KG

DEN-ADBASE

- Highly durable rubber black base with handle.
- Suits 'Ad Base' style 600x900mm signs (available separately)
- Suitable for warehouses, loading docks, carparks, entrance areas, roadways

BITUPAK 20KG BAGS

ATM-051420-50

- 5-7mm bituminous cold max
- Suitable for small or temporary repairs
- 20kg bag
- Density: 2.4 tonne/m³



SPADE BIT - 30MM

ATM-20027888

- Double spurs for cleaner holes and reduced breakout
- Curved scoop optimises control and removal of wood chips
- Full length heat treated body is stronger and lasts longer
- Quick Change shank for fast changing in Lock-n-Load adaptors

SPADE BIT - 15MM

ATM-20063764

- Double spurs for cleaner holes and reduced breakout
- Curved scoop optimises control and removal of wood chips
- Full length heat treated body is stronger and lasts longer
- Quick Change shank for fast changing in Lock-n-Load adaptors



COMBINATION FUEL & OIL CAN

ATM-900031250

- Useful for chainsaw operators
- Separated dual container for petrol and oil

**MISC.**

BACKPACK SPRAYER M18

TEC-M18BPFPCC-0

- No manual pumping required
- 5 mode pressure adjustment knob stays between 20-120 PSI
- 15L Tank
- 12 tanks of spraying per charge

10L JERRY CAN

ATM-JCP10LR

- Tested and Certified to Australian & New Zealand Standards AS/NZS 2906:2001
- Locking Cap with Safety Nozzle Inside
- Heavy Duty: Drop Tested, Leak Tested

